



Introducing
The All-New Meyer[®]
Diamond Edge Snowplow

It's the plow that doesn't lie down on the job.

Meyer® Diamond Edge With All-New Trip-Edge Design.

REDESIGNED FOR BETTER
CLEARING PERFORMANCE
IN LESS TIME.



TALLEST AND MOST AGGRESSIVE.

Meyer Diamond Edge plows feature the tallest and most aggressive contractor class moldboard on the market, with a 32" height and 70° attack angle.

This taller, more aggressive snowplow produces better overall clearing performance in less time. The attack angle also allows for better back dragging. And if you encounter obstacles when plowing, the bottom-trip design keeps the moldboard upright so you won't lose the load.

The trip-edge design keeps the moldboard upright, while the lower portion gives way when obstacles are struck, so you can keep plowing without losing the load.



32"

70°
Attack
Angle



MORE DURABLE DESIGN.

Key pressure zones create a stronger plow.

The larger, wider, more-solid pivot bar is made of heavy-walled tubular steel for added strength and rigidity at key pressure zones.



Behind the moldboard is totally redesigned "black iron" consisting of a robust, tubular steel A-frame and pivot bar. This improved design has been simplified to create a stronger plow at key pressure zones and more evenly distributes the load.

The pressure zones are further enhanced by three, reinforced points-of-contact and a tubular bar along the entire back for increased torsional strength. Meyer Diamond Edge plows come with easy-to-reach grease fittings in key locations like the heavy-duty king bolt.



Best built, best backed plows in the industry.

5 YEARS on all components and structural steel* with the purchase of an E-72 hydraulic.

* Must register new plow systems online at www.meyerproducts.com to activate the 5-year warranty.

The Meyer Diamond Edge shown with optional snow deflector.



Meyer Diamond Edge plows come standard with a reversible center hole punched cutting edge for longer wear life.

EASE OF USE, INTERCHANGEABLE MOUNT.

We don't call it "EZ" for nothing.

The modular EZ-Mount® Plus™ system conveniently attaches or detaches from the truck in less than a minute and leaves the truck with a clean, off-the-assembly-line appearance when not attached.


In the midst of a major storm, downtime is not an option. That's why the EZ-Mount Plus mounting system is interchangeable with other newer Meyer moldboards.

The Meyer Diamond Edge can also be attached using the time-tested EZ-Mount® Classic™ mounting system.



Shown with optional equipment.

Hands Free Plowing

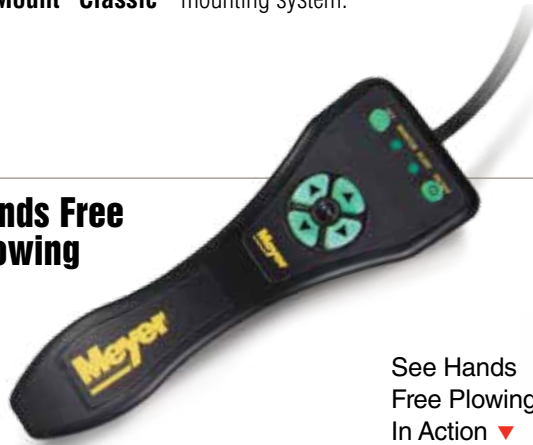

See Hands Free Plowing In Action ▼



All Meyer Diamond Edge plows feature a **Pistol Grip Controller with Hands Free Plowing** mode (HFP). When HFP is activated, the vehicle shift lever controls the up/down movement of the moldboard.

Fleet Friendly

The EZ-Mount Plus mounting system is **Fleet Friendly** because the moldboards and controllers are interchangeable.



Shown with optional equipment.

Product Specifications

| Model | Blade Type | Moldboard Length | Moldboard Height | Moldboard Gauge | Vertical Ribs | Plow Trip Springs | Cutting Edge | Average Width at Full Angle | Angling Rams | Weight Complete* |
|---------------------------|------------------|------------------|------------------|-----------------|---------------|-------------------|--------------|-----------------------------|--------------|------------------|
| Meyer Diamond Edge | | | | | | | | | | |
| DE2-7.5 | Bottom-Trip Edge | 7'6" | 32" | 12 gauge | 6 | 4 | 1/2" x 6" | 82" | 1 1/2" x 10" | 832 lb |
| DE2-8.0 | Bottom-Trip Edge | 8' | 32" | 12 gauge | 6 | 4 | 1/2" x 6" | 87" | 1 1/2" x 10" | 849 lb |
| DE2-8.5 | Bottom-Trip Edge | 8'6" | 32" | 12 gauge | 6 | 4 | 1/2" x 6" | 93" | 1 1/2" x 10" | 866 lb |
| DE2-9.0 | Bottom-Trip Edge | 9' | 32" | 12 gauge | 6 | 4 | 1/2" x 6" | 98" | 1 1/2" x 10" | 884 lb |

For a complete list of Meyer Diamond Edge accessories go to www.meyerproducts.com

* Average mount weight is 125 lbs.

Meyer Snow Plows are protected by one or more of the following patents: 8006413, D0507999 S, D0517963S, 8453358, 8695238, 7,918,042 B2, CA 2,677,509 C, D0517963 S, EP 1,989,402 B1, ES 2,346,587, 6136388, 7,531,087 B2, 7,661,211 B2, 7,793,440 B1, 8739437, 8793906, CA 2,604,085C, 6354024, 6276075, 6,318,975 B1, 6564479, 6256909, 6594923, 6618964, 7114270, 7117617, 7290359, D399326 S, CA 2,300,012 C, CA 2,314,772 C, CA 2,331,653 C, CA 2,370,925 C, CA 2,455,637 C, CA 2,653,801 C, CA 2,654,856, EP 1,010,809, 7353626, 6153975, 6273729, CA 2,260,509 C, CA 2,282,045 C, CA 2,293,858 C, CA 2,298,243 C, 6265829, 6015219, 6005300, 6163985.



Meyer Products LLC reserves the right under its continuing product improvement program to change construction or design details and specifications without incurring any obligation.